



Universal test bench inverter UPI1250

Inverter for 3/6-phase electrical motors



19" rack with MicroLabBox

Main features

- Power electronics with SiC modules with suitable driver control.
- Control and data acquisition via dSPACE MicroLabBox® with 50-pin DSub connectors
- AC and DC voltage acquisition ($\pm 0,6\%$, 0 – 800 kHz)
- DC and AC current acquisition ($\pm 1\%$, 0 – 72 kHz)
- Heat sink temperature sensing
- Connection possibilities for resolver and incremental encoders via interface cards
- Protection against overcurrent and overvoltage
- DC power supply via battery simulator or vehicle battery possible
- Internal FPGA logic for self-protection (max. frequency, hot branch, heat sink temperature)


Technical data:

Max. voltage DC:	1250 V
Continuous output AC:	1060 kVA @ 880 Veff
Continuous current AC:	700 Arms (3-phase), 350 Arms (6-phase)
Switching frequency:	1 kHz – 25 kHz (max. 50 kHz)
Continuous current AC vs. rotating field frequency	
DC link capacity:	1,12 mF
Protection class:	1, PE connection with min. 70 mm ²
Protection:	IP30
Permitted ambient temperature:	5 – 40 °C, non condensing humidity
Auxiliary power supply:	230 V (max. 500 VA) for inverter 230 V (max. 100 VA) for MicroLabBox®

Housing dimensions and cooling water connection:

Housing, weight:	approx. 590 x 605 x 310 mm (L x W x H)
Weight:	approx. 65 kg
Cooling water:	50:50 water-glycol, max. flow temperature: 25 °C, 30 L/min
Dimensions MicroLab-Box mounting:	approx. 450 x 450 x 140 mm (L x W x H)

Schematic representation:

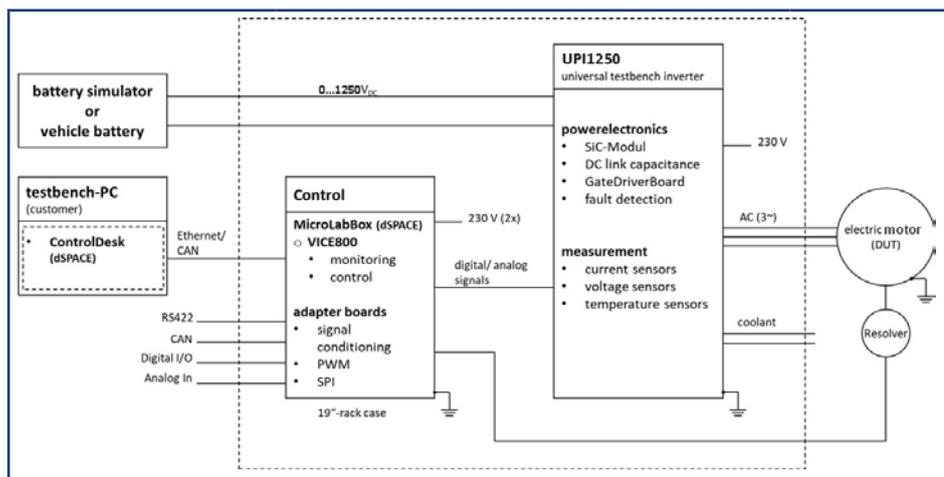

EESM extension



Main features

- Extension module to the UPI1250 for supplying externally excited machines (the module is integrated into the UPI1250 and must therefore be taken into account when ordering)
- Control and measured value acquisition via the UPI1250's control module
- Monitoring of coolant temperature, overcurrent and overvoltage
- Internal communication with the UPI1250 control board
- DC power supply directly from UPI1250 or externally via additional source possible
- Integrated buck converter to reduce the excitation voltage
- Current regulator for setting the excitation current
- Prepared for contactless and transformer-based transmission of the excitation current

Technical data:

Max. voltage DC:	1250V
Exciting current:	-40A... +40A
Continuous output AC:	max. 4 kW
Current dynamics:	depending on the regulation approx. 3A/ms ($> 500V @ L_{exc} = 140 \text{ mH}$ and $R = 2,9\Omega$)
Switching frequency:	10 ... 50 kHz
Housing:	approx. 690x605 x 410 mm (LxW x H)
Weight:	approx. 95 kg